

# Glass Tube Liquid Level Gauge PN 10

## Type 700.A1

### Applications

Direct reading liquid level indicator with glass tube for general applications up to CL150. Increased safety with ball check valves and glass protection.

### Special Features

- Connection top-bottom pivoted
- Handwheel
- Glass protection

### General Data

Center-to-center ME	max. 1200 mm
Sight length	ME – 110 mm
Diameter of glass tube*)	Ø 13,5 x 1,75mm
Actuation	handwheel
Valve passage	8 mm
Process connection	male thread G 1/2 DIN ISO 228 flange DN 15 - 25 / PN 10

#### Materials

- gauge heads steel 1.0570 / 1.0460
- gaskets for glass tube PTFE
- glass tube DURAN


The materials may vary depending upon availability.

### Design Data

Design temperature / Design pressure	up to 120°C / 10bar up to 200°C / 8bar
--------------------------------------	---

### Accessories

glass protection**)	plexiglass cover Ø 42mm
visual help	coloured float
Scale	division and unity to customers spec.

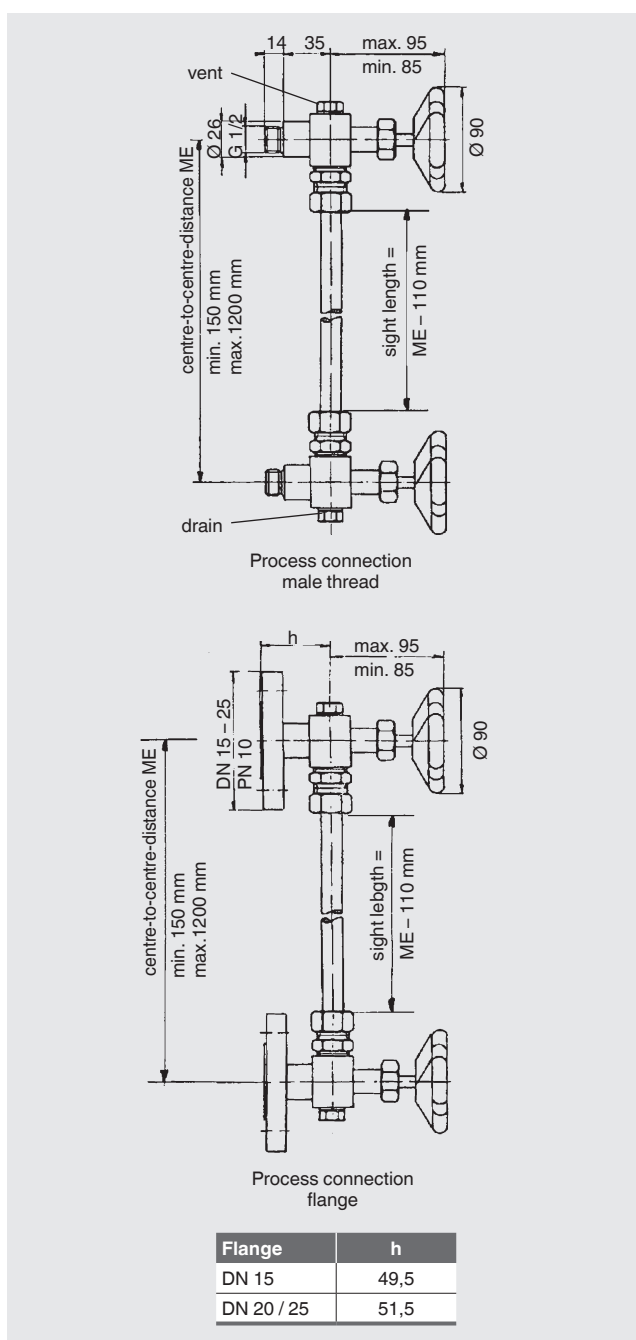

\*) length glasstube = ME – 65 mm

\*\*) length = ME – 55, product temperature max. 80°C.