

# Sight Glass Level Gauge CL up to 600

## Type 700.C601 (Reflex), 700.C602 (Transparent)

### Applications

Direct reading liquid level indicator for boiler level up to CL 600 (depends on glass type). Increased safety with ball check valves.

### Special Features

- Reflex, Transparent
- Connection side-side fixed
- Connection gauge valve to gauge chamber: flange
- Double shut-off, handwheel and lever

### General Data

Sight length SL	≤ ME
Connection gauge valve - body	flange
Gauge valve types	760.18
Actuation	handwheel and lever
Material sight glasses	
DIN 7081	Borosilikate, mica protection
Material media wetted parts	CS
Types with special materials are available.	

### Design Data


Derating depends on temperature and window size.

### Further Data

Process connection	see Connections
Vent	see Connections
Drain	see Connections

### Accessories

Glass protection etc.	see Accessories
Frosts protection	see Accessories
Illumination	see Accessories
Scale	see Accessories
Pointer flow water	see Accessories
Heating	see Accessories

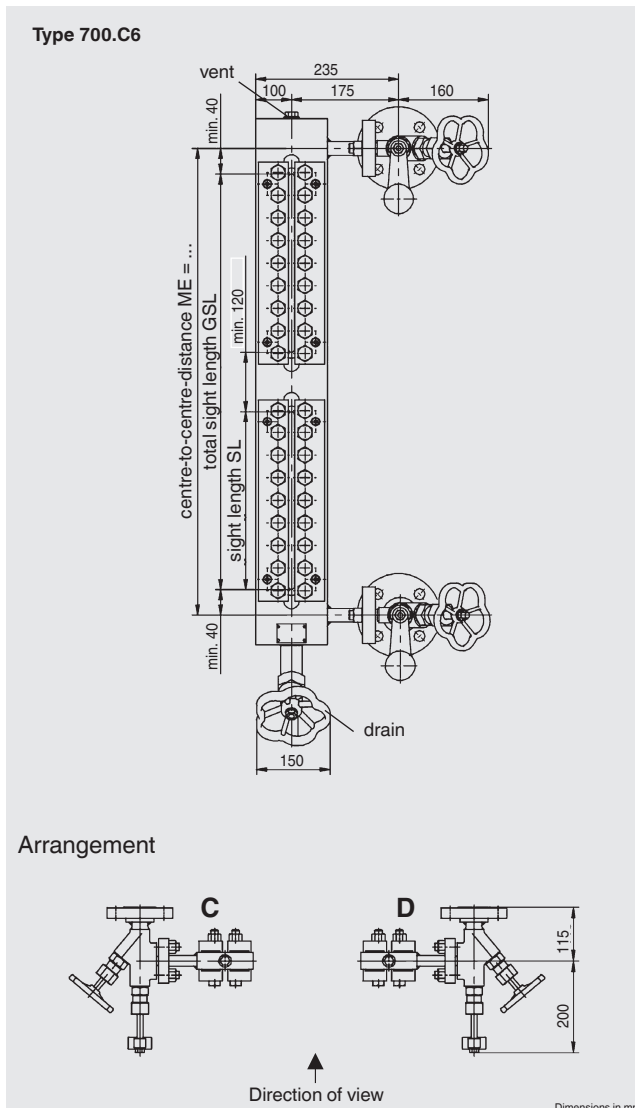

CS (= carbonsteel) and SS (= stainless steel type 316SS) are materials suitable for Pressure Vessels according to EN or ASME.