

# Sight Flow Indicators (straight line) PN 10

with loose connecting flanges (B) Stainless Steel



Bauform 108-B

## Application:

Sight Flow Indicators are used for optical control and the observation of filling and current in pipelines.

## Operating conditions:

Working pressure : PN 10

## Standard Materials:

Body : WN 1.4404 / 1.4571  
 Loose flanges : DIN 2642; PN 10; RSt 37-2 galvanized  
 Covers : RSt 37-2 / C 22.8 galvanized  
 Screws : DIN 912, steel  
 Sight glasses : Borosilicate glass acc. to DIN 7080  
 Soda lime glass acc. to DIN 8902  
 Gasket : Graphite (other materials are available on request)

## Installation:


Optional. Take care of flow direction

## Options:

Other materials  
 Compl. in stainless steel  
 Sight glass light-fitting  
 Spinner or Flap

## Ordering example:

Sight flow indicators Bauform 108-B  
 stainless steel, borosilicate glass 10 bar  
 DN 50 PN 10

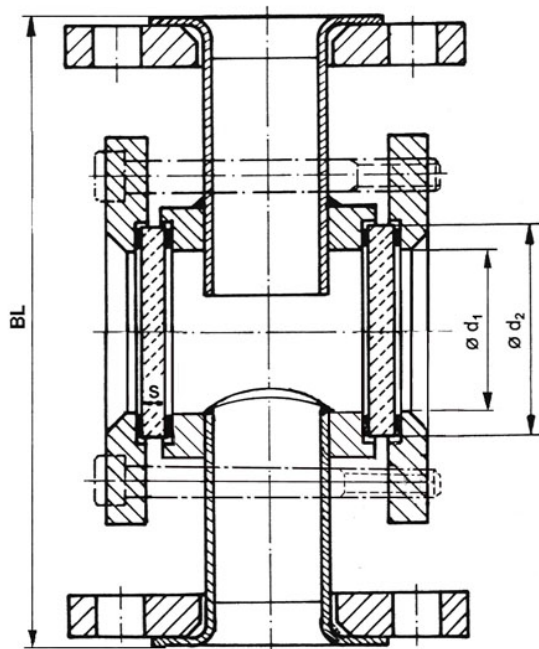

## Dimensions:

DN	BL	Glass plate		S	Screw S	Weight ca. Kg
		$\varnothing d_1$	$\varnothing d_2$			
15	130	32	45	10	M 8	4,1
20	150	48	63	10	M 10	4,5
25	160	48	63	10	M 10	6,7
32	180	65	80	12	M 10	8,4
40	200	65	80	12	M 12	8,7
50	230	80	100	15	M 12	10,9
65	290	80	100	15	M 12	12,9
80	310	100	125	15	M 12	18,1

Modification reserved



AVEMAR cz s.r.o., Lihovarská 10, 716 03 Ostrava - Radvanice  
 Tel.: +420 596 232 996, 596 232 997, Fax: +420 596 232 998  
 E-mail: avemar@avemar.cz, web: www.avemar.cz